

Product Name

H3

(External driver)


Technical description

Suspension fitting which stands out by its characteristic cleanliness and elegance, H3 intends to bring together the most advanced technology solutions in a classic and traditional style. Thanks to these peculiarities, H3 finds its ideal habitat in the most varied applications; In fact, it can be installed in shops, exhibitions, commercial areas or industrial environments.
 Base in die cast aluminum alloy UNI EN 1706 polyester powder coated with aluminum reflector turned, anodized and polished. Stainless steel screws AISI 304. LED light source (lumileds), colour temperature (4000 K Neutral White).
 High coefficient of performance chromatic CRI>80.



Supply

Driver toroidal mounted externally over the fitting to ensure optimum thermal performances.
 Available in ON-OFF, dimmable or DALI versions. Possibility to remote the driver for special applications.
 Voltage 220 - 240 V AC 50/60 Hz.
 Temperature -40° +45°

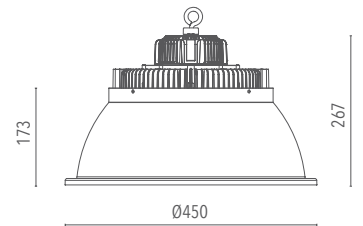

Installation

Suspended.

Applications


Commercial areas and industrial areas of small/medium size.

Size (mm)

Ø450 x 267

Colour

Aluminium 6



Decay of the luminous flux

≥100.000 hr L85B15

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00H34080BL60175	LED	175 W	21175 lm	29925 lm	4000 K	>80	80°	Aluminium	-
L00H34080DI60175	LED	175 W	21175 lm	29925 lm	4000 K	>80	80°	Aluminium	Dimmer
L00H34080DA60175	LED	175 W	21175 lm	29925 lm	4000 K	>80	80°	Aluminium	DALI

Accessories



Fast connector
IP 2 poles
LKITA00000000017



Fast connector
IP 3 poles
LKITA00000000003



Cable with connector
Ca. 2m/Co. IP 2 poli
LKITA00000000040
Ca. 2m/Co. IP 3 poli
LKITA00000000041

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.