

Product Name

# 3R2

(External driver)

Technical description

3R2 represents the union of three R2 combined in an AISI 304 stainless steel structure. This configuration allows to reach a very important lighting power, suitable for the most demanding applications. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness, 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (also in versions dimmable or DALI).  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Commercial areas; Industrial areas; Sport facilities; Assembling areas.

Size (mm)



570 x 720 x 655 mm

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L85B15

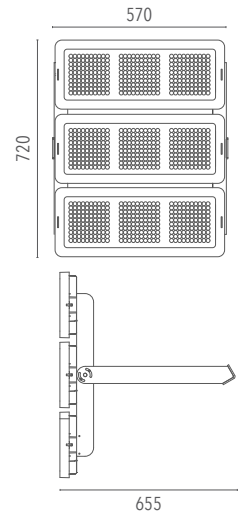

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L03R240BABL40900_001	LED	900 W	100987 lm	153900 lm	4000 K	>80	120°	Dark grey	-
L03R240BADI40900_001	LED	900 W	100987 lm	153900 lm	4000 K	>80	120°	Dark grey	Dimmer
L03R240BA0DA40900_001	LED	900 W	100987 lm	153900 lm	4000 K	>80	120°	Dark grey	DALI

Accessories



Fast connector IP 2 poles  
LKITA00000000017

Fast connector IP 3 poles  
LKITA00000000003

Laser pointer support kit  
LKITA00000000093

Junction box kit  
LKITA00000100021

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.